


BINDELLA 554A-L0108A-04

Bollard BINDELLA IP65 LED SMD 7W 960lm(725lm) CRI80 3000K 650mm Anthracite

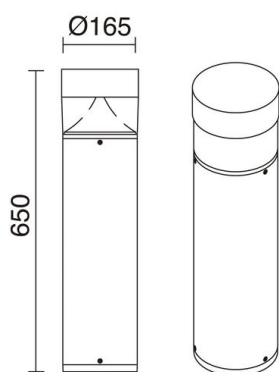

The Bindella beacon is made of aluminum in anthracite color with IP65 and emission temperature of 3000K. Light is dispersed rotosymmetrically. It is designed to illuminate outdoor walkways.

GENERAL DATA

Category	Bollards and columns
Family	Bindella
Finish	[04] Anthracite
Location	Outdoor
Installation	Floor
Body material	Aluminum
Diffuser material	Transparent polycarbonate
ETIM class	EC000301
EAN	8435258612965

LIGHT SOURCES AND BEAMS

Sources	LED SMD 7W 960lm(725lm) 3000K CRI80
Energy efficiency	E (3000K)
Beam	Rotosimétrica

TECHNICAL DATA

Dimensions	Diameter x Height (mm): 165 x 650
IP	IP65
IK	10
Protection class	Class I
Frequency	50/60 Hz
Input voltage	110-240V AC V
Auxiliary gear	Electronic
Operating temperature range	-30 - 40 °C
Lifetime	40,000 h
LED lifetime L	80
LED lifetime B	50
Weight	3.5 Kg
Cable outlets	1
ECORAE category I	LED-B
ECORAE I	0.5
Anchorage included	Yes
Flammable surfaces	Yes

BINDELLA 554A-L0108A-04

Bollard BINDELLA IP65 LED SMD 7W 960lm(725lm) CRI80 3000K 650mm Anthracite

PRODUCTS OF THE SAME FAMILY



554A-L01RDB