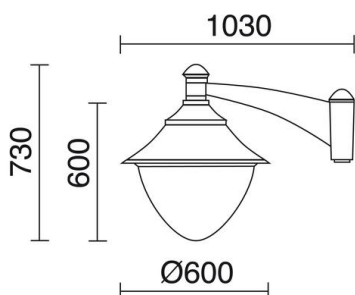


GUNTHER-60 408D-G31X1A-02

Luminaire for pole GUNTHER-60 IP65 GX53 9x10W 730mm Black



The Gunther 60 family is made of black resin with IP65. It consists of a wall light and a single and two arm pole luminaire. Its diameter is 60cm. The light is scattered directly. It is designed to illuminate the busy areas outside.

GENERAL DATA

Category	Bollards and columns
Family	Gunther-60
Finish	[02] Black
Location	Outdoor
Installation	Floor
Body material	Resin
Diffuser material	Transparent methacrylate
ETIM class	EC000062
EAN	8435256592351

LIGHT SOURCES AND BEAMS

Sources	GX53 LED Bulb 9x 10W
Lamp included	No
Beam	Direct symmetric

TECHNICAL DATA

Dimensions	Height x Width x Pole's top diameter x Length (mm): 730 x 600 x 60 x 1030
IP	IP65
IK	09
Protection class	Class II
Frequency	50/60 Hz
Input voltage	110-240V AC V
Auxiliary gear	Without equipment, not needed
Operating temperature range	-60 - 90 °C
Glow wire temperature	850.0 °C
Weight	1.0 Kg
Cable outlets	1
ECORAE category I	CAT-B
ECORAE I	0.5
Periodic maintenance	Yes
Anchorage included	Yes
Post with inspection chamber	Yes
Flammable surfaces	Yes

NOTES



suitable for installation in environments with saline atmosphere

Protected material against u.v.

GUNTHER-60 408D-G31X1A-02


Luminaire for pole GUNTHER-60 IP65 GX53 9x10W 730mm Black

RECOMMENDED ACCESSORIES


 	C04A-32-02 TopØ60 pole POSTES Resina Mod. 3000mm Black		
 	C04B-32-02 TopØ60 pole POSTES Resina Mod. 3500mm Black		
 	C04C-32-02 TopØ60 pole POSTES Resina Mod. 4000mm Black		
 	C04D-32-02 TopØ60 pole POSTES Resina Mod. 4500mm Black		
	B07B-L31E9A-00 replacement KIT 9 led lamp ACC ELECT GUNTHER LED GX53 9x7W	Input voltage Frequency Protection class	110-240V AC 50/60 Class II
 	378A-L3103A-02 Lamp LED T2 GX53 LED Bulb 3W 350lm(350lm) CRI80 4000K 120°	Input voltage Frequency Wattage (W) IP Protection class	110-240V AC 50/60 3.0 IP20 Class I
 	378A-L3104A-01 Lamp LED T2 GX53 LED Bulb 4W 320lm(320lm) CRI80 3000K 120°	Input voltage Frequency Wattage (W) IP Protection class	110-240V AC 50/60 4.0 IP20 Class I

GUNTHER-60 408D-G31X1A-02


Luminaire for pole GUNTHER-60 IP65 GX53 9x10W 730mm Black

**378A-L3106A-01****Lamp LED T2 GX53 LED Bulb 6W**
480lm(480lm) CRI80 3000K 180°


Input voltage	110-240V AC
Frequency	50/60
Wattage (W)	6.0
IP	IP20
Protection class	Class I

**378A-L3106A-02****Lamp LED T2 GX53 LED Bulb 6W**
480lm(480lm) CRI80 4000K 180°

Input voltage	110-240V AC
Frequency	50/60
Wattage (W)	6.0
IP	IP20
Protection class	Class I

**378C-L3111A-01****Lamp LED T2 GX53 LED Bulb 11W**
1300lm(1300lm) CRI80 3000K 90°
White

Input voltage	110-240V AC
Frequency	50/60
Wattage (W)	11.0
IP	IP20
Protection class	Class I

**378C-L3111A-02****Lamp LED T2 GX53 LED Bulb 11W**
900lm(900lm) CRI80 4000K 90°
White

Input voltage	110-240V AC
Frequency	50/60
Wattage (W)	11.0
IP	IP20
Protection class	Class I

GUNTHER-60 408D-G31X1A-02

Luminaire for pole GUNTHER-60 IP65 GX53 9x10W 730mm Black

PRODUCTS OF THE SAME FAMILY



Gunther-60 2 arms Gunther-60 W