

Short Trimless 8,4W

EM303
empotrado recessed

651Lm / 2700K~3000K
IP40 / CRI ≥ 90 / 15° 30° 40°

HER
Light Lovers.



GENERAL

negro black blanco white
empotrado recessed
IP40
IK07

APARATO DE ILUMINACIÓN LIGHTING FIXTURE

15° 30° 40°
IRC ≥ 90 CRI ≥ 90
IP40
MacAdam ≤ 3
UGR <19
difusor transparente
clear diffuser
valores de potencia del sistema (LED + driver): 9,3W
power values of the system (LED + driver): 9,3W

ACCESORIOS ACCESSORIES

no disponible
not available

ELÉCTRICA ELECTRICAL

8,4W
220-240VAC 50/60Hz
equipo incluido
gear included

MEDIDAS MEASURES

Ø68mm
altura: 67mm
height: 67mm

REGULACIÓN DIMMING

on / off

RECORTE CUTOUT

Ø39mm (TRIMLESS)
min. espesor del techo: 13mm (TRIMLESS)
min. ceiling thickness: 13mm (TRIMLESS)
máx. espesor del techo: -
max. ceiling thickness: -
profundidad empotrada: 72mm (TRIMLESS)
recessed depth: 72mm (TRIMLESS)


DESCRIPCIÓN DESCRIPTION

El sistema "clip out" despeja cualquier duda a la hora de decidirse por esta luminaria. Su belleza y rendimiento hacen de este trimless un downlight imprescindible en proyectos de Hospitality y Residencial.

Downlight with 'clip out' technology, it is a must in Hospitality and Residential

REFERENCIAS REFERENCES

EM303/27	2700K	651Lm	77,5Lm/W
EM303/30	3000K	651Lm	77,5Lm/W

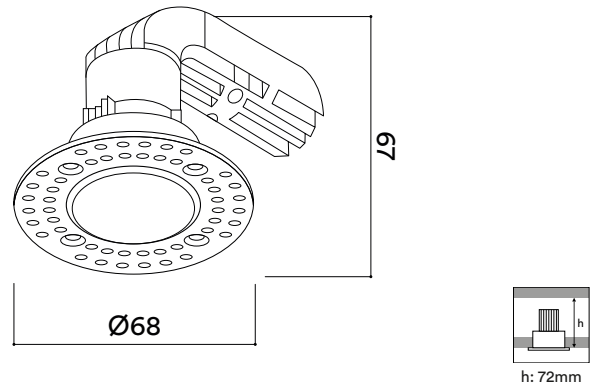

H(m)	D(cm)	Lux
1	29	2925
2	58	731
3	86	325

3000K 15°

H(m)	D(cm)	Lux
1	50	1465
2	100	366
3	151	162

3000K 30°

H(m)	D(cm)	Lux
1	74	1118
2	148	279
3	222	124

3000K 40°



cambio sin previo aviso change without notice